


PASO COLLECTION: PLATFORM BENCH: 97" DIA (PCB1970018)
Installation / Assembly Instructions

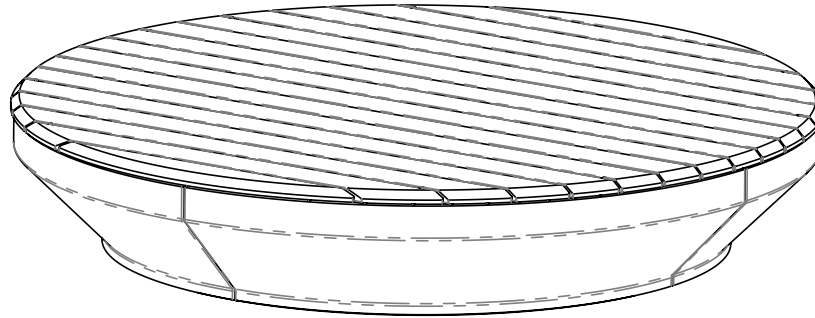

Product ships un-assembled. Assembly is required for free-standing or anchoring.

You can find information about caring for Tournesol products and materials by visiting: <https://www.tournesol.com/resources/fieldmanualscaremaintenance> where you can download Care & Maintenance documents.

INCLUDED

GFRC Quarter Base	4 pcs.
Wood Top Sections	3 pcs.
1/4"-20 Socket Head Cap Screw	12 pcs.
1/4" Flat Washer	12 pcs.
3/8"-16 Hex Bolt	16 pcs.
3/8" Hex Nut	16 pcs.
3/8" Flat Washer	32 pcs.

NEEDED FOR ANCHORING *Not included*

- 3/16" hex bit with non-impact driver or hand tool
- 9/16" socket or box wrenches
- Masonry bits, hammer drill
- Non-corrosive anchors, hardware with fender washers
- Optional: Sealant for anchor points and hardware

Unit should be moved in its shipping packaging to a location in close proximity to its final installed location. Carefully remove the packaging materials and inspect the unit for any damage that may have occurred during shipping. If damage has occurred, immediately report this to the shipping carrier at the time of delivery.

⚠ The GFRC bases have lifting points available for moving for short distances. These can be cut (removed) once placement is complete.

PASO COLLECTION: PLATFORM BENCH: 97" DIA (PCB1970018)
Installation / Assembly Instructions




Fig. 1

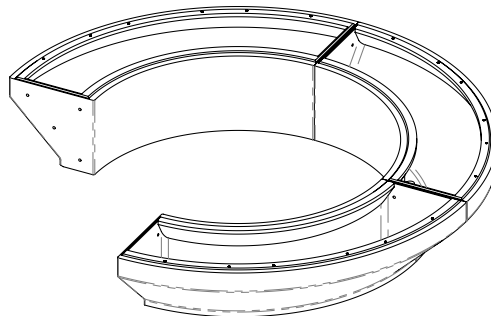


Fig. 2




Fig. 3

STEP 1


If anchoring to substrate is required, establish desired location, quantity, and type of anchoring (verify with project manager). Assure surface is level or shim around anchor location. Uneven surface conditions can damage product.

STEP 2

Place the four GFRP bases in the location of final position (figure 1 & 2). It may be necessary to dry fit the wood top sections onto the base group and align attachment points to identify preferred wood slat orientation. This may require shifting the position of the bases. Once orientation is established, remove wood tops.

STEP 3 (anchoring only)

With the GFRP bases in place mark and drill holes in each base to accommodate the selected anchor style and hardware. Clear any debris from inside the bench bases.

 *The GFRP base will have existing holes (fig. 3) for drainage and should not be used for anchoring.*

STEP 4 (anchoring only)

If adding anchors to substrate, use the bench base holes (as drilled in step 3) to mark anchor locations in the substrate. Drill holes in substrate for selected anchor style and hardware. Clear any debris from the substrate surface where bench rests to maintain level.

STEP 5

Set the four GFRP bases into place. If anchoring, attach non-corrosive anchors and hardware but do not tighten fully. Connect the bench segments to one another using the 3/8" hardware supplied (fig. 4). Do not fully tighten these connections.

STEP 6

Before tightening all hardware, verify that the four bases are level at the top surface and flush at the front edges. This may require slight shifting or shimming of the bases to achieve.

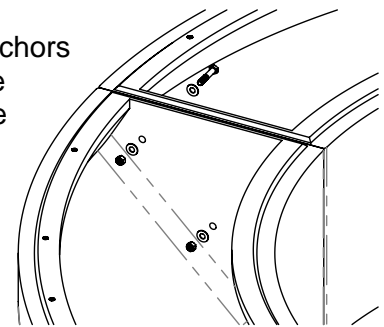


Fig. 4

STEP 7

With the bases level and aligned, tighten the base connection hardware and any anchoring hardware. Continue to verify that the top of the bases remains flat while tightening hardware.

PASO COLLECTION: PLATFORM BENCH: 97" DIA (PCB1970018)
Installation / Assembly Instructions

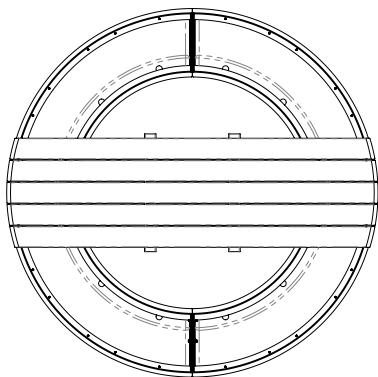


Fig. 5

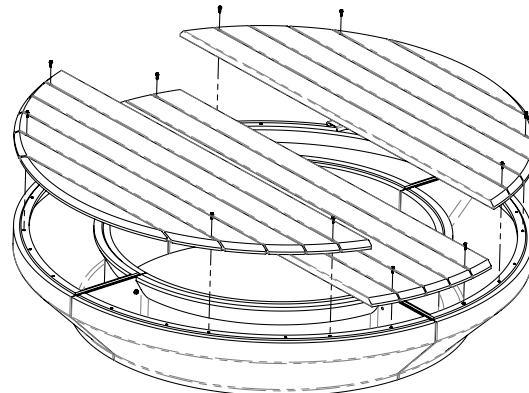


Fig. 6

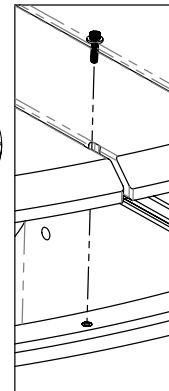


Fig. 7

STEP 8

Attach bench tops starting with the center section (fig. 5) with the four 1/4"-20 socket-head cap screws using a 3/16" hex driver (figure 6 & 7). Do not yet tighten these attachments.

STEP 9

With the center top section in place, attach the outside top sections in the same manner. It may be necessary to tilt the sections into place and then slide (figure 8 & 9) into its final position (1/4" gap) and screw into place with the 1/4"-20 screws. Tighten all attachment hardware but do not over-tighten.

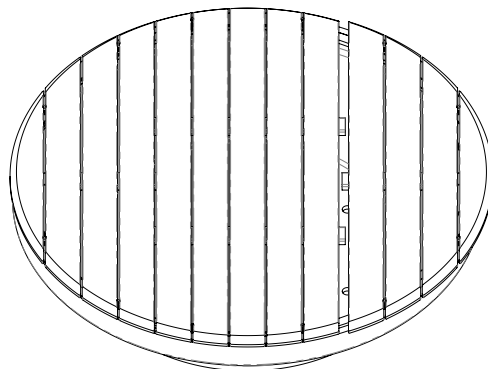


Fig. 8

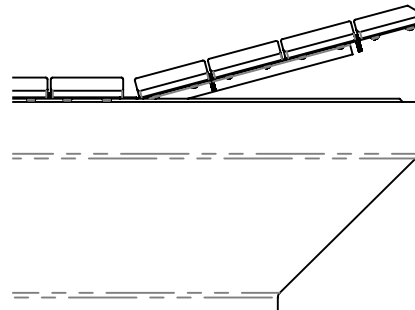


Fig. 9